


HEPA FILTERED GARMENT & MATERIAL STORAGE CABINETS & PASS THRUS

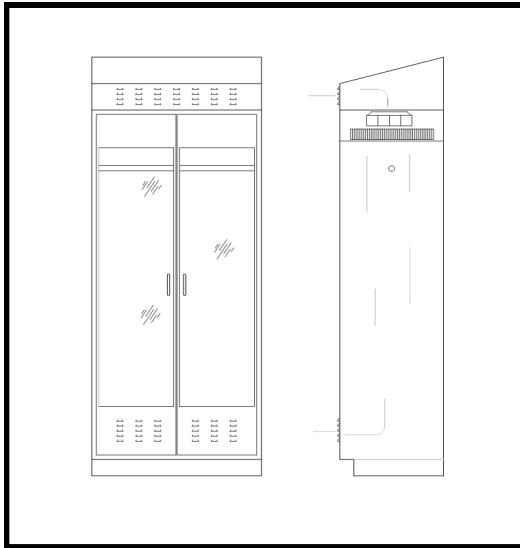

STANDARD FEATURES:

- Unit construction: 18 ga. 304 stainless steel with #4 finish.
- Integral Blower/Filter Module 99.99% efficient @ 0.3 microns.
- Stainless Steel framed full-light clear acrylic doors.
- Perforated stainless steel shelving for MCLF Series.
- Heavy gauge stainless steel 1 1/4" diameter rod for GCHF Series.
- 10 ft. power cord.
- Single Pass configuration low door grille discharge.

OPTIONAL FEATURES:

- 100% 316L stainless steel construction with #4 finish.
- ULPA filtration 99.9995% efficient @ .12 microns.
- Optional voltages in 230 v 60 hz 1 ph, and 277 v 60 hz 1 ph.
- Electro magnetic interlocked doors.
- Mechanically interlocked doors.
- Recirculating configuration.
- Cross flow configuration.
- Integral flow-through lighting.
- Solid doors/sliding doors.
- Adjustable shelves.
- Wire shelves.
- Heavy-duty shelving for high load bearing.
- Custom sizes.
- CI-1 Div-1, CI-1 Div-2, CI-2 Div 1.

OPTIONAL PASS THRU CONFIGURATION SHOWN WITH SPLIT DOUBLE DOORS BOTH SIDES, LIGHTED INTERIOR AND MAGNETIC INTERLOCK

NOTE:

- All filters are PSL challenged at factory to insure media integrity. Certificates of conformance are available upon request.
- Unit performance meets or exceeds standards as specified in Fed. Std. 209E / ISO 5 and IES-RP-CC-002.
- All electrical wiring is in conformance with NEMA standards.

MODEL	O.A. UNIT SIZE	STD ELECTRICAL	PERFORMANCE
MCLF-36	22"d x 36"w x 78"h	115 v - 60hz - 1 ph - FLA= 1.6	90 FPM +/- 20%
GCLF-36	22"d x 36"w x 78"h	115 v - 60hz - 1 ph - FLA= 1.6	90 FPM +/- 20%
MCLF-48	22"d x 48"w x 78"h	115 v - 60hz - 1 ph - FLA= 1.6	90 FPM +/- 20%
GCLF-48	22"d x 48"w x 78"h	115 v - 60hz - 1 ph - FLA= 1.6	90 FPM +/- 20%

**All information herein is subject to change without notice.*

**All catalog dimensions are nominal.*



© 7/2021